



 Lexmark™

Lexmark C4352

Colour made easy



Lexmark C4352

Designed for security, ease of use, and sustainability, the Lexmark C4352 delivers professional colour for mid-to-large workgroups at speeds up to 50 pages per minute*. The 10.9 cm tablet-like touchscreen makes completing your printing tasks intuitively easy. Replacement cartridges with Unison™ Toner yield up to 20,000/11,500 black/colour pages** to keep you going.

Make a statement with professional colour

Enjoy the benefits of vibrant, professional-quality output allowing you to do more colour printing in-house - saves time and money. Match corporate colours on marketing collateral and brand-sensitive text and graphics with PANTONE® calibration and Lexmark Named Colour Replacement.

Made to last. Easy to upgrade.

- ▶ With durable steel frames, long-life components and high-yield cartridges, printers are intentionally engineered to last seven years or more.
- ▶ Long-lasting Unison™ Toner delivers consistently outstanding print quality, reduces internal wear on long-life components, and protects the print system.
- ▶ Easily upgradeable to the latest apps and security features.



Always easy. Always intuitive.

- ▶ Powerful features are easy to use.

- ▶ Large, tablet-like, button-free touchscreens help you intuitively complete every task, from the basic to the complex.
- ▶ Add Lexmark or third-party apps to meet your specific business needs.

Secure by design

Lexmark security features help keep your information safe - in the document, on the device, over the network and at all points in between. Our comprehensive approach to product security is a design and engineering mandate across our entire product portfolio.

Sustainability matters

- ▶ Designed for the circular economy.
- ▶ Automatic two-sided printing is standard, along with built-in energy-saving modes that help support ratings of EPEAT® Silver and ENERGY STAR® certified.
- ▶ The award-winning Lexmark Cartridge Collection Programme (LCCP) and Lexmark Equipment Collection Programme (LECP) minimise waste and support recycling (availability varies by country).

Power up with IoT


- ▶ Sophisticated, IoT-enabled printers are loaded with sensors that continuously monitor hundreds of data points.
- ▶ When you connect your device to Lexmark Cloud Services, you can optimise performance and uptime with additional features like predictive service and automatic supplies replenishment.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: www.lexmark.com/ISOspeeds.

** Average yield based on approximately 5% print coverage. In demonstration of circular economy principles, genuine Lexmark supplies with Unison™ Toner may contain components recovered from the Lexmark Cartridge Collection Programme (LCCP).

Lexmark C4352

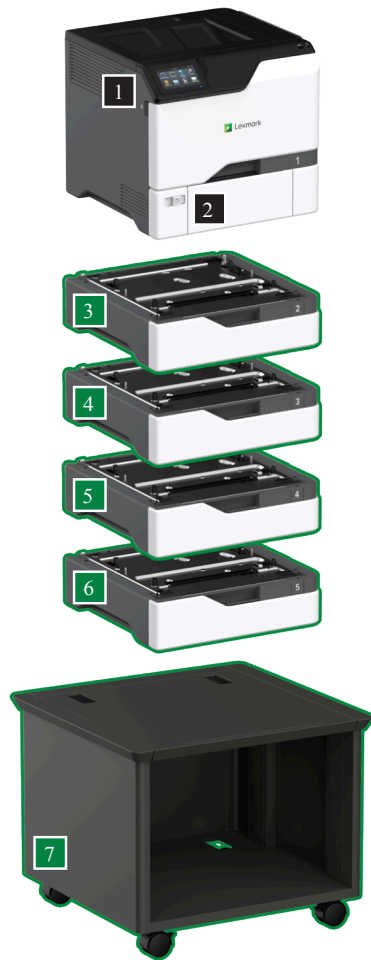

- 1 **Printer with 10.9 cm touch screen**
413 x 479 x 489 mm
- 2 **550-Sheet tray with 100-sheet multipurpose feeder**
Dimensions included as part of base model
- 3 **550-Sheet Tray**
119 x 463 x 483 mm
- 4 **550-Sheet Tray**
119 x 463 x 483 mm

- 5 **550-Sheet Tray**
119 x 463 x 483 mm
- 6 **550-Sheet Tray**
119 x 463 x 483 mm
- 7 **Adjustable Stand**
521 x 653 x 625 mm



P/N 47C9473 **Hardware**
Lexmark C4352

P/N 24B7511 **Supplies**
Lexmark C4342, C4352 Cyan 11.5K Toner Cartridge
24B7512 Lexmark C4342, C4352 Magenta 11.5K Toner Cartridge
24B7513 Lexmark C4342, 4352 Yellow 11.5K Toner Cartridge
24B7514 Lexmark C4342, 4352 Black 20K Toner Cartridge
71C0W00 Lexmark CS/CX730, 735, C/XC4342, C4352 170K Waste Container
71C0Z10 Lexmark CS/CX730, 735, C/XC4342, C/XC4352 Black 150K Imaging Unit
71C0Z50 Lexmark CS/CX730, 735, C/XC4342, C/XC4352 Colour (CMY) 150K Imaging Unit

P/N 40C2100 **Paper Handling**
550-Sheet Tray

P/N 27X0400 **Memory Options**
57X0070 500+ GB Hard Disk
Removable Hard Disk Enclosure Kit
57X9528 Intelligent Storage Drive (ISD)

P/N 57X0300 **Application Solutions**
57X0301 Contact Authentication Device
Contactless Authentication Device
82S1203 IPDS Licence
82S1204 Bar Code Licence

P/N 1021294 **Connectivity**
27X0823 USB Cable - 2 Metre
MarkNet N8370 Wireless for CS720, CS725, CX725
27X6410 Lexmark MarkNet N8372 802.11 a/b/g/n/ac Wireless Print Server
SPD0002 Surge Protective Device, 220-240V

P/N 40C2300 **Furniture**
Adjustable Stand

Product Specifications

Lexmark C4352

Printing

Display	Lexmark e-Task 10.9 cm (4.3-inch) colour touch screen
Print Speed	Up to: Black: 50 ppm ¹ (A4) / Colour: 50 ppm ¹ (A4)
Time to First Page	as fast as: Black: 5.6 seconds / Colour: 6.1 seconds
Print Resolution	Black: 1200 x 1200 dpi, 4800 Colour Quality (2400 x 600 dpi) / Colour: 4800 Colour Quality (2400 x 600 dpi), 1200 x 1200 dpi
Memory	standard: 1024 MB / maximum: 1024 MB
Hard Disk	Intelligent Storage Drive available; Magnetic Hard Disk available
Recommended Monthly Page Volume	2,000 - 20,000 Pages ²
Maximum Monthly Duty Cycle	Up to: 150,000 pages per month ³

Supplies⁴

Laser Cartridge Yields	up to: 11,500 ⁵ -page Colour (CMY) High Yield Cartridges / up to: 20,000 ⁵ -page Black High Yield Cartridge
Imaging Unit Estimated Yield	Up to: 150,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage ⁶
Cartridge(s) Shipping with Product	5,000 ⁵ -page Black and Colour (CMYK) Return Programme Toner Cartridges ⁵

Paper Handling

Included Paper Handling	100-Sheet Multipurpose Feeder, Integrated Duplex, 300-Sheet Output Bin, 550-Sheet Input
Optional Paper Handling	550-Sheet Tray
Paper Input Capacity	Up to: Standard: 650 pages 75 gsm bond / Maximum: 2,850 pages 75 gsm bond
Paper Output Capacity	Up to: Standard: 300 pages 75 gsm bond / Maximum: 300 pages 75 gsm bond
Media Types Supported	Vinyl Labels, Banner Paper, Paper Labels, Card Stock, Plain Paper, Envelopes, Refer to the Paper & Speciality Media Guide
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope

General Information⁷

Standard Ports	Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear Hi-Speed USB port Compatible with USB 2.0 Specification (Type A), USB 2.0 Specification Hi-Speed Certified (Type B), One Internal Card Slot
Optional Network Ports	Internal MarkNet N8370 802.11b/g/n/a Wireless, NFC
Noise Level	Operating: 53 dBA (Print)
Specified Operating Environment	Temperature: 10 to 32°C (50 to 90°F) / Altitude: 0 - 2,896 Metres (9,500 Feet) / Humidity: 15 to 80% Relative Humidity
Product Guarantee	1-year Onsite Service + 3-years Parts Only guarantee (Maintenance Kit included)
Size / Weight	H x W x D: 413 x 479 x 489 mm / 32 kg
ENERGY STAR Typical Electricity Consumption	TEC: 0.65 kilowatt-hours per week

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹ Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵ Average yield based on approximately 5% print coverage. ⁶ Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁷ Printers are sold subject to certain licence/agreement conditions. See www.lexmark.com/printerlicense for details.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

© 2022 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries and regions. MOPRIA®, the Mopria® Logo, and the Mopria Alliance™ word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT is a trademark of the Green Electronics Council in the United States and other countries. PANTONE® is the property of Pantone LLC. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/> (<http://www.openssl.org/>)).



lexmark.co.uk