



Lexmark MX953se

Versatile. Simple. Sustainable.













Lexmark MX953se

With the new MX953se monochrome A3 multifunction printer, you get reassuring versatility, exceptional sustainability, and surprising simplicity from such sophisticated technology. Boost your productivity with high-quality prints — up to 55 pages per minute*. Intuitively navigate the 10-inch (25 cm) color touchscreen, and save time with single-pass two-sided scanning. Effortlessly create everything your business requires, and custom configure your multifunction printer with interchangeable options tailored to your needs.

Versatile: Easy to Use

Create everything your business requires and anything you can imagine — from standard office documents to marketing brochures, booklets and posters — with broad media size support, high-volume printing, and exceptional paper handling and finishing capabilities.

Print crisp visualizations, charts and documents with deep blacks and smooth grays and a full range of media sizes so your customers can effectively communicate to co-workers, customers, and partners.

Easily incorporate your multifunction printer into your workspace with a versatile, configurable design that saves space without sacrificing performance.

Boost your productivity with our rich suite of cutting-edge software and solutions with broad capabilities including scanning paper files directly into your cloud-based storage systems and automatically translating documents into 100+languages.

Further your organization's digital transformation with direct integration into your critical workflows and core business systems using these IoT-enabled devices.



Simple: Easy to Manage

Quickly do what you need to do using an intuitive operator panel and easy-to-follow navigation.

Easily maintain your devices with one-handed toner replacement, easy-to-reach serviceable areas, and alerts that are simple to understand.

Enjoy the peace of mind of knowing you are protected by the industry's most comprehensive security portfolio, right out of the box.

Keep your business running with exceptional reliability, industry-leading durability, and long-lasting toner and supplies.

Rest easy that every aspect of your device is made to work together seamlessly thanks to Lexmark's core technology ownership.

Sustainable: Easy to feel good about

Feel good about your purchase and help meet your own sustainability goals with our world-class practices and independent third-party certifications.

Do your part for the planet with our industry-leading use of post-consumer recycled materials and our award-winning cartridge recycling program.

Save energy — and money — with technology that exceeds strict global standards for energy efficiency.

Minimize your impact on the environment with a company that focuses on sustainability throughout the product lifecycle from design through use, end of life and beyond.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

^{*} Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: www.lexmark.com/ISOspeeds.

^{**} Fax icon shown on the operator panel when Fax Server is enabled, Fax Over IP is configured, etherFAX is configured, or an optional Analog Modem is installed.

Lexmark MX953se

8

9

Cabinet


9.7 x 23.1 x 26.0 in.

247 x 587 x 660 mm

11.4 x 13.5 x 21.4 in.

290 x 342 x 545 mm

1500-Sheet High-Capacity Tray

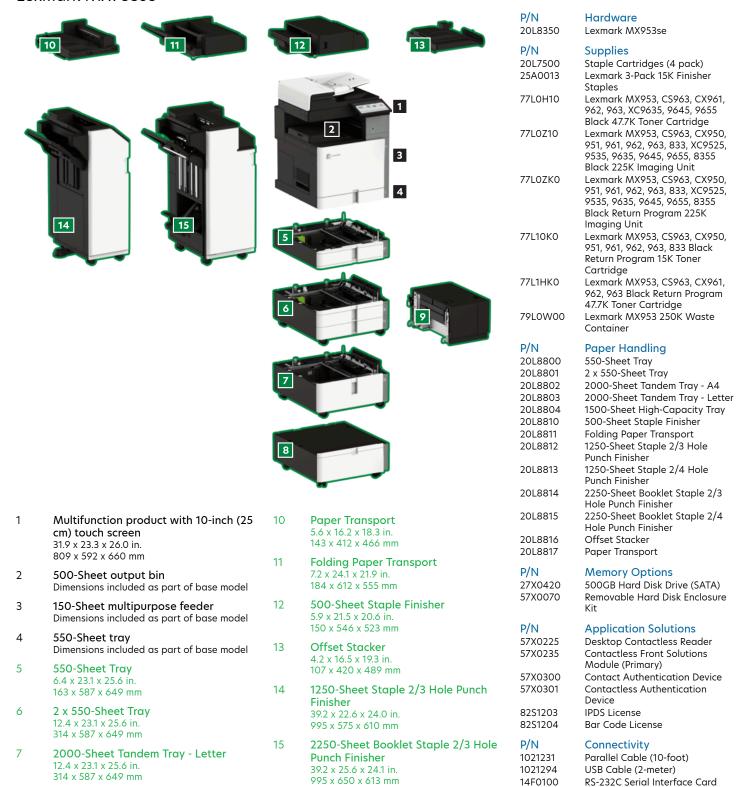

Standard

Optional

P/N Furniture
20L8806 Cabinet
20L8807 Keyboard Shelf

27X0142

37X6146

57X7040

SPD0001

Lexmark MarkNet™ N8230 Fiber

Ethernet Print Server

English Keyboard Kit

Surge Protective Device,

Fax Card Option

110-120V

You can install one 550-Sheet tray.

You can install one 2x550-Sheet tray, one 2,000-Sheet tandem tray or one Cabinet, but you must also install one 550-Sheet tray above it. You can install one 1,500-Sheet high-capacity tray, but you must install one 2x550-Sheet tray or one 2,000-Sheet tandem tray beside it.

You can install one 500-Sheet staple finisher, one Offset stacker or one Folding paper transport unit.

You can install one 1,250-Sheet staple hole punch finisher or one 2,250-Sheet booklet staple hole punch finisher, but you must also install a Paper transport unit or Folding paper transport unit, one 550-Sheet tray, and one 2x550-Sheet tray or one 2,000-Sheet tandem tray or one Cabinet.

Product Specifications	Lexmark MX953se					
Printing						
Display	Lexmark e-Task 10-inch (25 cm) class color touch screen					
Print Speed	Up to: Black: 55 ppm ¹ (Letter)					
Time to First Page	As fast as: Black: TBD seconds					
Print Resolution	Black: 1200 x 1200 dpi, 2400 IQ					
Memory	Standard: 4 GB / Maximum: 4 GB					
Hard Disk	Intelligent Storage Drive included; Magnetic Hard Disk available					
Recommended Monthly Page Volume	4,000 - 20,000 pages ²					
Maximum Monthly Duty Cycle	Up to: 150 000 pages per month ³					
Copying						
Copy Speed	Up to: Black: 55 cpm ¹ (Letter)					
Time to First Copy	As fast as: Black: TBD seconds					
Scanning						
Scanner Type / ADF Scan	Flatbed scanner with automatic document feeder / DADF (single pass Duplex)					
A4/Ltr Duplex Scan Speed	Up to: Black: 200/200 sides per minute / Color: 200/200 sides per minute					
A4/Ltr Simplex Scan Speed	Up to: Black: 100/100 sides per minute / Color: 100/100 sides per minute					
ADF Paper Input Capacity	Up to: 200 pages 20 lb or 75 gsm bond					
Supplies ⁴						
Laser Cartridge Yields	up to: 47,700 ⁵ -page Black Cartridge					
Imaging Unit Estimated Yield	Up to: 225,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage					
Cartridge(s) Shipping with Product	5,000 ⁵ -page Black Toner Cartridge ⁵					
Paper Handling						
Included Paper Handling	500-Sheet Output Bin, 550-Sheet Tray, 150-Sheet Multipurpose Feeder					
Optional Paper Handling	2,250-Sheet Booklet Staple Hole Punch Finisher, 500-Sheet Staple Offset Finisher, Folding Paper Transport Unit, 1,250-Sheet Staple Hol Punch Finisher, Offset Stacker, 1,500-Sheet High-Capacity Tray, Paper Transport Unit, 2000-Sheet Tandem Tray, Cabinet, 2 x 550-Sheet Tray, 550-Sheet Tray					
Paper Input Capacity	Up to: Standard: 700 pages 20 lb or 75 gsm bond / Maximum: 4750 pages 20 lb or 75 gsm bond					
Paper Output Capacity	Up to: Standard: 500 pages 20 lb or 75 gsm bond / Maximum: 2650 pages 20 lb or 75 gsm bond					
Media Types Supported	Vinyl Labels, Labels, Card Stock, Plain Paper, Envelopes, Glossy Paper, Refer to the Paper & Specialty Media Guide					
Media Sizes Supported	Aó, Oficio, 7 3/4 Envelope, JIS-B4, 9 Envelope, JIS-B5, A3, Ledger, A4, Legal, SRA3, A5, Hagaki Card, Letter, B5 Envelope, C4 Envelope, Statement, C5 Envelope, Executive, DL Envelope, Folio, 10 Envelope					
General Information						
Standard Ports	Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), 802.11a/b/g/n/ac + Apple iBeacon, USB 2.0 Specification Hi-Speed Certified (Type B)					
Optional Network Ports / Optional Local Ports	MarkNet N8230 Fiber Ethernet Print Server / Internal 1284-B Bidirectional Parallel, Internal RS-232C serial					
Noise Level	Operating: TBD dBA (Print) / TBD dBA (Copy) / TBD dBA (Scan)					
Specified Operating Environment	Altitude: 0 - 2896 Meters (9,500 Feet) / Humidity: 15 to 80% Relative Humidity / Temperature: 10 to 32.2°C (50 to 90°F)					
Limited Warranty	See Statement of Limited Warranty: 1-Year Onsite Repair, Next Business Day					
Size / Weight	H x W x D: 31.9 x 23.3 x 26.0 in. / TBD lb.					
ENERGY STAR Typical Electricity Consumption	TEC: TBD kilowatt-hours per week					

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

1 Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

© 2024 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are registered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT® is a trademark of the Green Electronics Council in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (http://www.openssl.org/).



² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵ Average standard page yield value declared in accordance with ISO/IEC 19752.